

Dynamic® SRL-LE

LEADING EDGE SELF-RETRACTING LIFELINES

Our new leading edge SRL series is stronger and more durable than standard SRLs, allowing workers to safely tie off at foot level.




What is a Leading Edge?

They are the unprotected edge of a fall hazard. If a worker were to fall over a leading edge, the fall arrest system that the worker is wearing will contact and create a 90-degree angle over this edge. Standard SRL class lifelines may tear and snap in this situation, therefore CSA has added a new SRL-LE classification.

How does an SRL-LE protect the worker?

Leading edge SRLs are designed to be anchored below the user's D-ring and are tested to withstand a fall over a sharp edge. They also feature an external energy absorber that keeps forces manageable, ensuring these forces remain under the safe usage limits of both the lifeline and the worker.

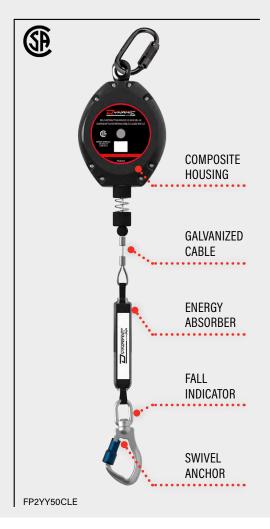

Dynamic® SRL-LE Series

Auto-locking fall arrest device, designed for anchoring above and below the user's D-ring and approved for foot level tie off.

- Certified CSA Z259.2.2-17, Class SRL-LE
- Tested against leading edge applications
- Immediately reduces free-fall distance and force to the user in the event of a fall
- Ideal where fall clearance is an issue
- Swivel anchor point with carabiner included
- Durable composite housing for reduced weight versus steel alternatives
- External energy absorber
- Fall indicators identify if a fall event has occurred
- Available in 20 / 30 / 50 ft lengths
- Rated for 59 to 141 kg / 130 to 310 lbs
- Max arresting force of 8kN / 1,800 lbs

STYLE	TYPE	MATERIAL	HARNESS CONNECTOR	ANCHORAGE CONNECTOR	CSA CLASS	LENGTH
FP2YY20CLE	Single	Galvanized Cable	Swivel Snap Hook	Triple Action Carabiner	CSA Z259.2.2-17	20 ft (6.1 m)
FP2YY30CLE	Single	Galvanized Cable	Swivel Snap Hook	Triple Action Carabiner	CSA Z259.2.2-17	30 ft (9.1 m)
FP2YY50CLE	Single	Galvanized Cable	Swivel Snap Hook	Triple Action Carabiner	CSA Z259.2.2-17	50 ft (15 m)

