



SPECIFICATION SHEET

313-1400



ANSI TYPE R CLASS 3 & CAN/CSA Z96 X-BACK SHORT SLEEVE T-SHIRT

- 5 oz. polyester birdseye mesh
- Durable lightweight performance wicking material
- 2" silver reflective tape
- 1 chest pocket

APPLICATIONS

- Roadway construction workers
- Survey crews
- Utility workers
- Railway & metro workers
- Emergency response personnel

CARE INSTRUCTIONS

Machine wash, 104°F or 40°C max, 30 cycles. The high visibility properties of this garment must be kept clean to be effective. If faded or permanently soiled it must be replaced with a new one.

TECHNICAL DATA

MATERIAL	100% Polyester
CONSTRUCTION	Main Fabric: 140g/m ² 100% polyester birdseye mesh Accessories: 110g/m ² 100% polyester rib, 2" silver reflective tape
COLOR	■ Hi-Vis Lime Yellow or ■ Hi-Vis Orange
SIZES	S - 5X
PACKAGING	1 per poly bag, 5 per inner pack, 25 per case
CASE DIMENSIONS	19.7" x 11" x 16.9" / 50cm x 28cm x 43cm
CASE WEIGHT	26.5 lbs / 12 kg
COO	China


BARCODES

ITEM	BAG	INNER PACK	CASE
■ 313-1400-LY/S	616314130601	01616314130600	02616314130609
■ 313-1400-LY/M	616314117343	01616314117342	02616314117341
■ 313-1400-LY/L	616314117336	01616314117335	02616314117334
■ 313-1400-LY/XL	616314117350	01616314117359	02616314117358
■ 313-1400-LY/2X	616314117367	01616314117366	02616314117365
■ 313-1400-LY/3X	616314117374	01616314117373	02616314117372
■ 313-1400-LY/4X	616314117381	01616314117380	02616314117389
■ 313-1400-LY/5X	616314125751	01616314125750	02616314125759
■ 313-1400-OR/S	616314203114	01616314203113	02616314203112
■ 313-1400-OR/M	616314203121	01616314203120	02616314203129
■ 313-1400-OR/L	616314203138	01616314203137	02616314203136
■ 313-1400-OR/XL	616314203145	01616314203144	02616314203143
■ 313-1400-OR/2X	616314203152	01616314203151	02616314203150
■ 313-1400-OR/3X	616314203169	01616314203168	02616314203167
■ 313-1400-OR/4X	616314203176	01616314203175	02616314203174
■ 313-1400-OR/5X	616314203183	01616314203182	02616314203181



DIMENSIONS (in/cm)

	S	M	L	XL	2X	3X	4X	5X
A	44 / 111.8	48 / 121.9	50 / 127	52 / 132.1	54 / 137.2	58 / 147.3	61 / 154.9	63 / 160
B	27.5 / 70	28.5 / 72.4	29 / 73.7	30 / 76.2	31 / 78.7	31.5 / 80	32 / 81.3	33 / 83.8
C	9.5 / 24.1	10 / 25.4	10.5 / 26.7	11 / 27.9	11 / 27.9	11.5 / 29.2	12 / 30.5	12.5 / 31.8
D	10 / 25.4	10.5 / 26.7	11 / 27.9	11.5 / 29.2	12 / 30.5	12 / 30.5	12.5 / 31.8	13 / 33

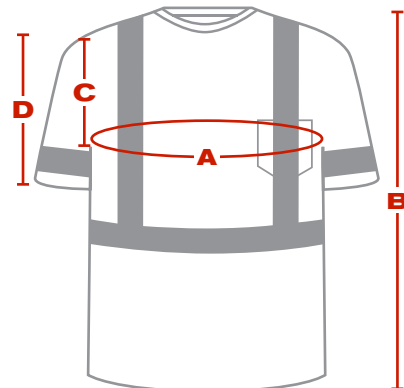

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.