
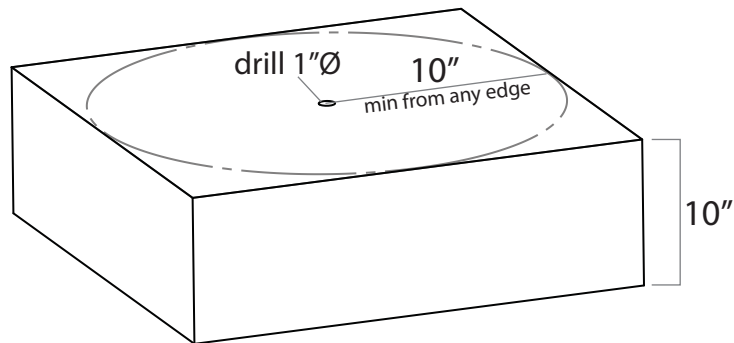


## DESCRIPTION

### Dynamic 10,000-lbf / 44kN Removable Bolt Anchor.

A removable and reusable anchor designed to work in 25mm (1") drilled hole in concrete substrates.

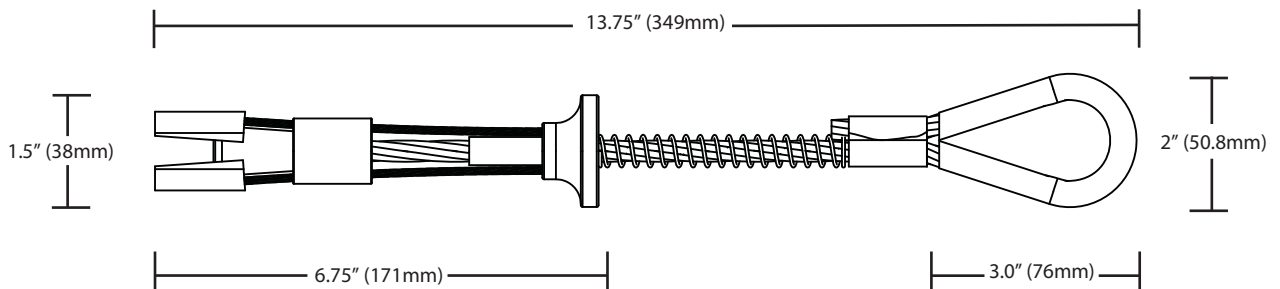

## SPECIFICATIONS

<b>UTS</b> 10,000-lbf / 44kN	<b>Max User Weight</b> 310-lbs / 140kg	<b>Working Load</b> 2000-lbs / 908kg
---------------------------------	---	---

## MATERIALS

<b>Spoons</b> Stainless Steel	<b>Swage</b> Zinc Plated Copper	<b>Cone</b> Stainless Steel	<b>Thimble Loop</b> Zinc Plated Steel
<b>Cleaning Bushing</b> Zinc Plated Steel	<b>Spring</b> Zinc Plated Steel	<b>Stop Sleeve</b> Stainless Steel	<b>Trigger</b> Aluminum
<b>Main Cable</b> Aircraft Cable	<b>Return Wire</b> Aircraft Cable		

## PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
FP3731-1	Concrete	Blue	10,000-lbf (44kN)	467g