


DESCRIPTION

Dynamic EZ-Slider 5,000-lbf / 22kN Beam Anchor.

A removable and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker. Available in two sizes that are adjustable from 3"-14" and a 12"-30" with a minimum flange thickness of .25".



ACCEPTABLE INSTALLATION ORIENTATIONS

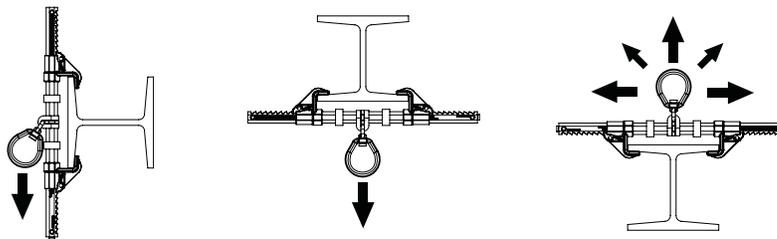

SPECIFICATIONS

- ▼
UTS
 5,000-lbf / 22kN
- ▼
Max User Weight
 310-lbs / 140kg
- ▼
Working Load
 1000-lbs / 454kg

MATERIALS

- ▼
Clamps
 Bronze
- ▼
Support Bar
 Aluminum
- ▼
Swivel
 Zinc Plated Steel
- ▼
Swivel Mount
 Stainless Steel
- ▼
Rollers
 Nylon

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	CE0321	LOADING	WEIGHT
FP3732-414	I & H Beams	Yes	5,000-lbf (22kN)	1578g
FP3732-1230	I & H Beams	No	5,000-lbf (22kN)	3282g