


DESCRIPTION

Dynamic 5,000-lbf / 22kN Drop Through Anchor

A removable and reusable anchor designed for over head applications. Cable length determined by customers needs.

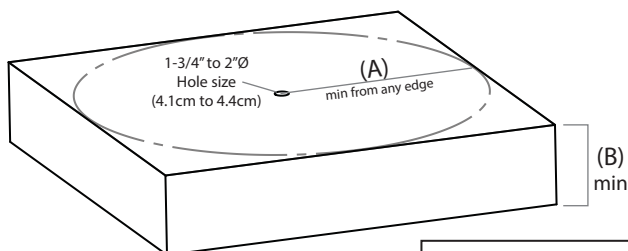

HOLE REQUIREMENT CHART

Material:	(A)\" Minimum distance from edge/corner	(B)\" thickness
Concrete	12\" in. (30.5 cm)	4\" in. (10 cm)
Steel	4\" in. (10 cm)	1/4\" in. (.635 cm)

SPECIFICATIONS



UTS

5,000-lbf / 22kN



Max User Weight

310-lbs / 140kg



Working Load

1000-lbs / 454kg

MATERIALS



Plate

Coated Steel



Swivel Ring

Zinc Plated Steel



Cable

Aircraft Cable



Tubing

Polyurethane

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
FP3735-DTA5	Concrete / Steel	Yellow	5,000-lbf (22kN)	Varies